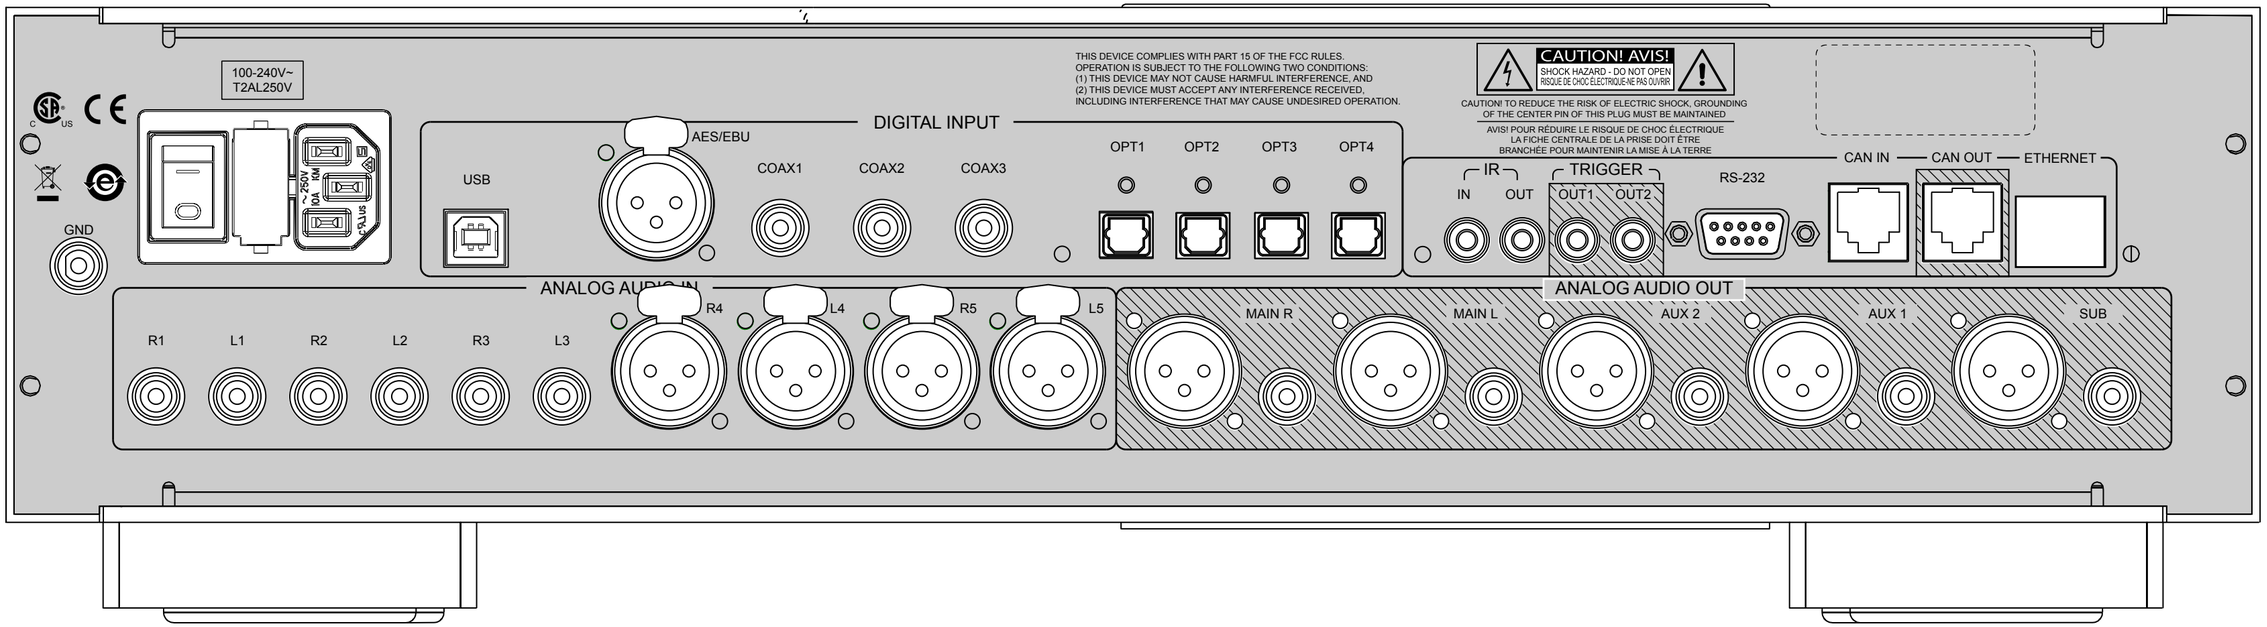
100-240V~
T2AL250V
GND
THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES.
OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:
(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND
(2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED,
INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.
CAUTION! AVIS!
SHOCK HAZARD - DO NOT OPEN
RISQUE DE CHOC ÉLECTRIQUE-NE PAS OUVRIR
CAUTION! TO REDUCE THE RISK OF ELECTRIC SHOCK, GROUNDING
OF THE CENTER PIN OF THIS PLUG MUST BE MAINTAINED
AVIS! POUR RÉDUIRE LE RISQUE DE CHOC ÉLECTRIQUE
LA FICHE CENTRALE DE LA PRISE DOIT ÊTRE
BRANCHÉE POUR MAINTENIR LA MISE À LA TERRE
DIGITAL INPUT
USB
AES/EBU
COAX1
COAX2
COAX3
OPT1
OPT2
OPT3
OPT4
IR
IN
OUT
TRIGGER
OUT1
OUT2
RS-232
CAN IN
CAN OUT
ETHERNET
ANALOG AUDIO IN
R1
L1
R2
L2
R3
L3
R4
L4
R5
L5
ANALOG AUDIO OUT
MAIN R
MAIN L
AUX 2
AUX 1
SUB

CP-800 REAR